



Shine Brighter.....



Connect to our

DIGITAL WORLD



SCAN HERE
Download Update Catalogue

DEVARSHI INDUSTRIES PRIVATE LIMITED


(AN ISO : 9001:2015 Certified Company)

Plot No. 68, Damanganga Estate, Dungri Faliya, Dharampur Road, Vapi - 396 195.

Customer Care : +91 9586915178 / +91 9173464836

Email : jecorlights@gmail.com / Web.: www.jecorlights.com

Mfg. all type of LED LIGHTS & FIXTURES



Shine Brighter.....

MODEL	JTB5	JLB9	JTB12	JLB18	JLB36
Input Power	5W	9W	12W	18W	36W
Luminous Intensity	500	900	1200	1800	3600
Input Voltage	90-265VAC,50Hz				
Correlated Color Temperature	3000-6500k				
CRI	More than 80				
Swivelling body action	Both Side 90deg Vertically & 35deg Horizontally				
Finish	Power Coated / Colour - White				
Operating Temperature	(-20 deg to 50 deg centigrade)				
Application	Home Lighting, Offices, Workshops, Various indoor use				

LED T-BULB & BULB



MODEL	JTL5	JTL10	JTL20	JTL24	JTL40
Input Power	5W	10W	20W	24W	40W
Lumens	500	1000	2000	2400	4000
Input Voltage	90-265VAC,50Hz				
Correlated Color Temperature	3000-6500k				
CRI	More than 80				
Operating Temperature	(-20 deg to 50 deg centigrade)				
Application	Home Lighting, Offices, Workshops, Working Tables, Parking Lighting				

LED TUBE LIGHTS -T5/T8



MODEL	JLS2	JLS3	JLS5
Input Power	2W	3W	5W
Luminous Intensity	200	300	500
Input Voltage	90-265VAC,50Hz		
SHAPE	ROUND / SQUARE		
CRI	More than 80		
CORRELATED COLOUR TEMPERATURE	RED, GREEN, BLUE, PINK, WARM WHITE, COOL WHITE, NATURAL WHITE		
Operating Temperature	(-20 deg to 50 deg centigrade)		
Application	HOME LIGHTING, OFFICE LIGHTING, MALL, SHOW ROOM, INDOOR USE		

LED SPOT LIGHT & STRIKER



MODEL	JLD3	JLD5	JLD7	JLD9
Input Power	3W	5W	7W	9W
Luminous Intensity	300	500	700	900
Input Voltage	90-265VAC,50Hz			
Correlated Color Temperature	RED, PINK, BLUE, GREEN, WARM WHITE, COOL WHITE, NATURAL WHITE,			
CRI	More than 80			
SHAPE	ROUND			
Operating Temperature	(-20 deg to 50 deg centigrade)			
Application	HOME LIGHTING, OFFICE LIGHTING, MALL, SHOW ROOM, INDOOR USE			

JUNCTION LED LIGHTS





Shine Brighter.....



MODEL	JPLSE5R	JPLSE8R	JPLSE12R	JPLSE15R	JPLSE18R	JPLSE22R
Input Power	5W	8W	12W	15W	18W	22W
Outer Size (mm)	75 x 75	100 x 100	170X170	170X170	170X170	220 x 220
Cutout Size (mm)	60 x 60	85 x 85	150X150	150X150	150X150	205 x 205
Lumens	400	800	1200	1500	1800	2200
Input Voltage	90-265VAC,50Hz					
Power Factor	0.95					
Correlated Color Temperature	3000 to 6500K					
CRI	More than 80					
Finish	Powder Coated / Colour - White					
Housing	Pressure Die Casting / PC					
Operating Temperature LED	(-20 deg to 50 deg centigrade)					
Mounting	Recess					
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls, Indoor					

RECESS MOUNTED EDGELITS
Sq/Ro



MODEL	JPLSE5S	JPLSE8S	JPLSE12S	JPLSE15S	JPLSE18S	JPLSE22S
Input Power	5W	8W	12W	15W	18W	22W
Outer Size (lxwxh) mm	85 x 85 x 50	110 x 110 x 50	170X170X50	170X170X50	170X170X50	230 x 230 x 50
Luminous Intensity	500	800	1200	1500	1800	2200
Input Voltage	90-265VAC 50Hz					
Power Factor	0.95					
Correlated Color Temperature	3000 to 6500K					
CRI	More than 80					
Finish	Powder Coated / Colour - White					
Housing	Pressure Die Casting Frame / PC					
Operating Temperature	(-20 deg to 50 deg centigrade)					
Mounting	Surface					
Application	Office and Conference Rooms, Home & Galleries, Showrooms, Malls, Indoor					

SURFACE MOUNTED EDGELITS
Sq/Ro



MODEL	JMCP8	JMCP12	JMCP15	MCP18
Input Power	8W	12W	15W	18W
Lumens	800	1200	1500	1800
Input Voltage	90-265VAC,50Hz			
Power Factor	0.95			
Correlated Color Temperature	MULTI COLOUR (RGB, PGB)			
CRI	More than 80			
Finish	Powder Coated / Colour - White			
Shape	Square & Round			
Function	SWITCH ON / OFF			
Mounting	Recess / Surface			
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls, Indoor			

MULTI COLOUR LED PANEL



just use home switch to control the colour
Lighting synchronous → Lighting subsection → Lighting Both



MODEL	J3SP8	J3SP12	J3SP15	J3SP18	J3SP22
Input Power	8W	12W	15W	18W	22W
Lumens	800	1200	1500	1800	2200
Input Voltage	90-265VAC,50Hz				
Power Factor	0.95				
Correlated Color Temperature	Warm White, Cool White, Natural White (Three in One)				
CRI	More than 80				
Finish	Powder Coated / Colour - White				
Shape	Square & Round				
Function	SWITCH ON / OFF				
Mounting	Recess / Surface				
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls, Indoor				

3 STAPE LED PANEL LIGHTS



FANCY & DECORATIVE LIGHTS

As a Customize



FANCY LIGHTS





Shine Brighter.....



Models	JTL3C	JTL6C	JTL9C	JTL12C	JTL15C	JTL18C	JTL24C	JTL30C
Input Power	3W	6W	9W	12W	15W	18W	24W	30W
Lumens	300	600	900	1200	1500	1800	2400	3000
Input Voltage	90-265VAC,50Hz							
Power Factor	0.95							
Correlated Color Temperature	3000-6500k							
CRI	More than 80							
Finish	Powder Coated / Colour - White							
Housing	Pressure Die Casting Frame							
Operating Temperature	(-20 deg to 50 deg centigrade)							
Mounting	Recess							
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls							

RECESS MOUNTED Sq/Ro DOWN LIGHT




Product Code	JTL9C	JTL15C	JTL18C	JTL24C	JTL30C
Input Power	9W	15W	18W	24W	30W
Lumens	900	1500	1800	2400	3000
Input Voltage	90-265VAC,50Hz				
Power Factor	0.95				
Correlated Color Temperature	3000-6500k				
CRI	More than 80				
Finish	Powder Coated / Colour - White				
Housing	Pressure Die Casting Frame				
Operating Temperature	(-20 deg to 50 deg centigrade)				
Mounting	Recess				
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls				

TRACK LIGHT



Customized Fancy Lights	
Input Voltage	90-265VAC,50Hz
Power Factor	0.95
Correlated Color Temperature	3000-6500k / RGB / RSB
CRI	More than 80
Finish	Powder Coated / Colour - White, Black
Housing	Pressure Die Casting Frame
Operating Temperature	(-20 deg to 50 deg centigrade)
Mounting	WALL MOUNTING
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls, Out door

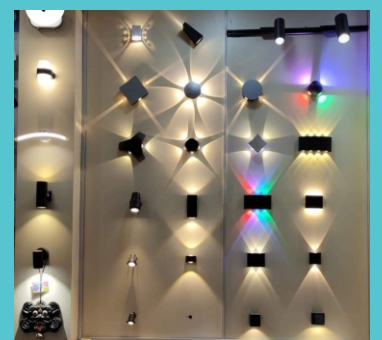


Product Code	JSL60	JSL120	JSL180	JSL240
LED / MITTER	60LED	120LED	180LED	240LED
Input Voltage	90-265VAC,50Hz			
Power Factor	0.95			
Correlated Color Temperature	RED, PINK, BLUE, GREEN, WARM WHITE, COOL WHITE, NATURAL WHITE			
Finish	PLASTIC & STREEP			
Housing	Pressure Die Casting Frame			
Application	Office and Conference Rooms, Home&Galleries, Showrooms, Malls Out door			

STRIP & ROPE LIGHTS






MODELS	JLP20	JLP25	JLP36	JLP45
LED Woltage	20W	25W	36W	45W
Lumens	2000	2500	3600	4500
Housing	Alluminium			
Finish :	Epoxy Powder Coated			
Diffuser Closure	Milky White Acrylic glare Free illumination.			
Outer Dimensions	75 x 1200mm			
Power Supply Driver	Constant current with Power factor >0.95 and THD<10%			
Function	Remote Control, Alexa Control, Censor Control			
Input Voltage	90-265VAC,50Hz			
Color Temp (CT)	4000-5700k			
CRI	More than 80			
Life	50,000 burning hrs			
Application	Industrial Shed / Factories / Workshop			

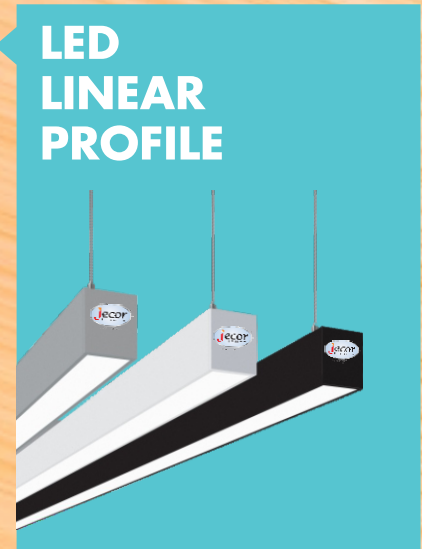

MODELS	JLP20	JLP25	JLP36	JLP45
LED Woltage	20W	25W	36W	45W
Lumens	2000	2500	3600	4500
Housing	Alluminium			
Finish :	Epoxy Powder Coated			
Diffuser Closure	Milky White Acrylic glare Free illumination.			
Outer Dimensions	7mm, 14mm, 17mm, 25mm,35mm, 50mm, 75mm, 100mm			
Power Supply Driver	Constant current with Power factor >0.95 and THD<10%			
Function	Remote Control, Alexa Control, Censor Control			
Input Voltage	90-265VAC,50Hz			
Color Temp (CT)	4000-5700k			
CRI	More than 80			
Life	50,000 burning hrs			
Application	Industrial Shed / Factories / Workshop			

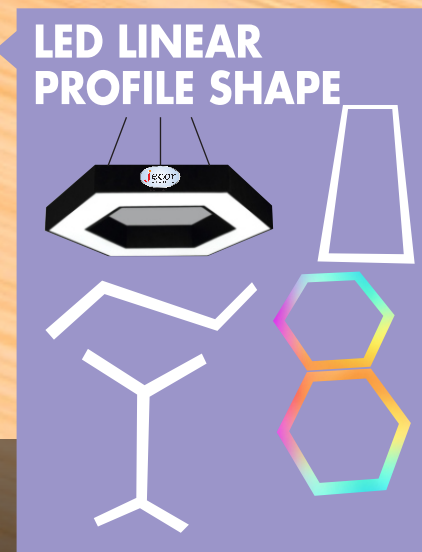

Technical Specification				
MODELS	JWGL36	JWGL45	JWGL50	JWGL80
Input Power (Woltage)	36W	45W	50W	80W
Lumens (100Lm/Watt)	3600	4500	5000	8000
Rated Working Voltage	90-265VAC,50Hz - Constant Current output			
Correlated Color Temperature	3000 - 6500K			
LED Type	High efficiency - Long life - High power LED			
LED Life	>50,000Hrs.			
Electronic Drive - PowerFactor/THD	PF>0.95 & THD < 10% (APFC)			
Operating Temperature LED	(-20 deg to 50 deg centigrade)			
Housing	Extruded Section as heat sink & Casting Aluminium Control Gear Box			
Lens	PC Material Transparent & Opec			
Beam Angle - Multi Highbay	60/90 Degree			
Mounting	'I' Bolt provided for Hanging			
Ingress Protection	Up to IP 65			
Application	Industrial Shed / Factories/ Workshop			



SENSOR LIGHTS

LED Bulb / Tube Lights / Panel Lights / Profile Lights / Foot Lights
LED Swimming Pool Lights & Customize Works





Shine Brighter.....




Code	JCR-TO/BO-36W-45W - 60W
Housing	CRCA
Finish :	Epoxy Powder Coated
Diffuser Closure	Milky white Acrylic for Glare Free illumination.
Outer Dimensions	595x595mm
Power Supply Driver	Constant current with Power factor >0.95 and THD < 10%
Light Source	MID POWER LED
Ingress Protection	up to IP65
Light Configuration	Backlit Type
Input Voltage	230AC
Correlated Color Temperature	3000-6500K
LED Waltage	36W/45W/60W
Lumen Per Watt	100 lm/W
Lumens	3600lm/4500lm/6000lm
Life	50,000 burning hrs
Application	Office and Conference room ,showrooms and Shopping malls

LED CLEAN ROOM




Code	JSPO-R-36W, 45W, 70W
Housing	Extruded Aluminium Sections
Diffuser Closure	Milky white Acrylic for Glare Free illumination.
Outer Dimensions	595x595mm
Power Supply Driver	Constant current with Power factor >0.95 and THD < 10%
Light Source	MID POWER LED
Light Configuration	Edgelit Type
Input Voltage	230AC
Correlated Color Temperature	3000-6500K
LED Waltage	36W, 45W, 70W
Lumen Per Watt	100lm/W
Lumens	3600lm
Life	50,000 burning hrs
Application	Office and Conference room ,showrooms and Shopping malls

LED SLIM PANEL OFFICE LIGHT

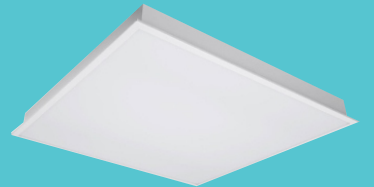

Code	JOL-R-36W-45W - 60W
Housing	CRCA
Finish :	Epoxy Powder Coated
Diffuser Closure	Milky white Acrylic for Glare Free illumination.
Outer Dimensions	595x595mm
Power Supply Driver	Constant current with Power factor >0.95 and THD < 10%
Light Source	MID POWER LED
Light Configuration	Backlit Type
Input Voltage	230AC
Correlated Color Temperature	3000-6500K
LED Waltage	36W/45W/60W
Lumen Per Watt	100 lm/W
Lumens	3600lm/4500lm/6000lm
Life	50,000 burning hrs
Application	Office and Conference room ,showrooms and Shopping mall

LED OFFICE LIGHT




BOLLARD & GATE LIGHTS

	9W	12W	15W	18W	24W
LED Type	LED / COB				
Size	Customize IP 65				
Metarial	Aluminum / PC				

BOLLARD LIGHTS





Shine Brighter.....

Technical Specification		Glass / Lens / Cob model							
MODEL	JSL18P	JSL24P	JSL30P	JSL36P	JSL50P	JSL70P	JSL100P	JSL120P	
Input Power (Wattage)	18W	24W	30W	36W	50W	70W	100W	120W	
Lumens (110Lm/Watt)	1800	2400	3000	3600	5000	7000	10,000	12,000	
Rated Working Voltage	90-265VAC, 50Hz - Constant Current output								
Beam Angle	135 Degree								
Correlated Color Temperature	3000 - 6500K								
CRI	up to 85								
LED Type	High efficiency - Long life - High power LED								
Electronic Drive - PowerFactor/THD	PF>0.95 & THD < 10% (APFC)								
LED Life	>50,000Hrs.								
Operating Temperature LED	(-20 deg to 50 deg centigrade)								
Housing	Pressure Die Casting								
Diffuser	PC Diffuser 4mm Lens / Glass								
Ingress Protection	Up to IP 66								
Application	Street lighting/Garden lighting/Campus lighting								
Customization									

LED STREET LIGHT



Technical Specification		Glass & Lens model				
MODEL - MULTI LED	JFL20PM	JFL30PM	JFL50PM	JFL100PM	JFL150PM	JFL200PM
Input Power (Wattage)	20W	30W	50W	100W	150W	200W
Lumens (110Lm/Watt) - Multi	2000	3000	5000	10000	15000	20000
Rated Working Voltage	90-265VAC, 50Hz - Constant Current output					
Beam Angle - Multi	120 Degree					
Correlated Color Temperature	3000 - 6500K					
CRI	up to 85					
LED Type	High efficiency - Long life - High power LED					
Electronic Drive - PowerFactor/THD	PF>0.95 & THD < 10% (APFC)					
LED Life	>50,000Hrs.					
Operating Temperature LED	(-20 deg to 50 deg centigrade)					
Housing	Pressure Die Casting					
Diffuser	PC Macking Toughened glass					
Mounting	C Type Mounting Bracket / PDC Frame					
Ingress Protection	Up to IP 66					
Application	Yard - Outdoor lighting					

LED ECO FLOOD LIGHT



Technical Specification		JHB50HM	JHB80HM	JHB100HM	JHB150HM	JHB200HM
MODEL						
Input Power (Wattage)		50W	80W	100W	150W	200W
Lumens (100Lm/Watt)		5000	8000	10000	15000	20000
Rated Working Voltage		90-265VAC, 50Hz - Constant Current output				
Correlated Color Temperature		3000 - 6500K				
LED Type		High efficiency - Long life - High power LED				
LED Life		>50,000Hrs.				
Electronic Drive - PowerFactor/THD		PF>0.95 & THD < 10% (APFC)				
Operating Temperature LED		(-20 deg to 50 deg centigrade)				
Housing		Extruded Section as heat sink & Casting Aluminium Control Gear Box				
Lens		PC Material				
Beam Angle - Multi Highbay		60/90/120 Degree				
Mounting		'I' Bolt provided for Hanging				
Ingress Protection		Up to IP 65				
Application		Industrial Shed / Factories/ Workshop				

LED HIGHBAY LIGHT



Technical Specification		JFLP50	JFLP80	JFLP100
MODEL				
Input Power (Wattage)		50W	80W	100W
Lumens (100Lm/Watt)		5000	8000	10000
Rated Working Voltage		90-265VAC, 50Hz - Constant Current output		
Correlated Color Temperature		3000 - 6500K		
LED Type		High efficiency - Long life - High power LED		
LED Life		>50,000Hrs.		
Electronic Drive - PowerFactor/THD		PF>0.95 & THD < 10% (APFC)		
Operating Temperature LED		(-20 deg to 50 deg centigrade)		
Housing		Extruded Section as heat sink & Casting Aluminium Control Gear Box		
Lens		PC Material / Glass		
Beam Angle - Multi Highbay		60/90 Degree		
Mounting		'I' Bolt provided for Hanging		
Ingress Protection		Up to IP 65		
Application		Industrial Shed / Factories/ Workshop		

FLAMEPROOF LED LIGHTS





Jecor Lights, we as a manufacturing company with the registered trade mark, specialization in lighting fixture products has constantly looked forward in cutting edge products and advanced technologies in the market.

Our range of solutions are crafted after first understanding the customer's requirements and then using the best in class infrastructure and technology to create products that effectively address those needs.

Taking best solutions as our starting point, we are constantly involved in the development of daring and positive business activities. It is our aim to continue to provide our customers with the very best in cutting-edge solutions. We will continue to grow as a top class specialized technology manufacturing company that provides top class products incorporating the most innovative technology expertise and information with excellent coordination skills and global support systems.

Beauty and aesthetics are also important to address the modern day requirements and satisfaction of our customers! The package of solutions that we provide will certainly give you satisfaction and peace of mind and an experience of smart energy usage!



Make customized light manufacturers as a required of interior and architect

BRANCHES : JODHPUR, AHMEDABAD, INDORE, PUNE, JALGAON, NAGPUR, AMRAVATI, JAIPUR, GURUGRAM, KOLKATA, RANCHI, NASIK, JHUNJHUNU



DEVARSHI INDUSTRIES PRIVATE LIMITED

(AN ISO : 9001:2015 Certified Company)

Plot No. 68, Damanganga Estate, Dungri Faliya, Dharampur Road, Vapi - 396 195.

Customer Care : +91 9586915178 / +91 9173464836

Email : jecorlights@gmail.com / Web.: www.jecorlights.com